


9V2835 SERIES

48V STRIP

FN-F2835-80-48



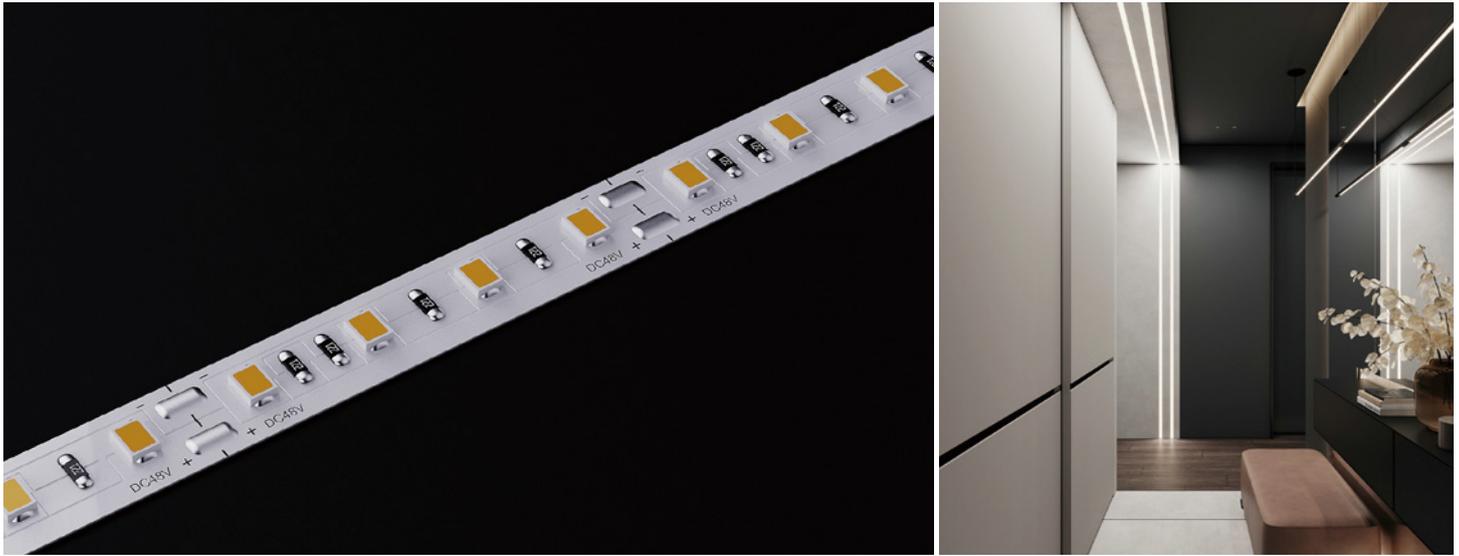

CCT Available



Features

- LED Type: 9V 2835LED ensure short cutting segment
- Run lengths: up to 18meters (59 feet)
- Waterproof: IP64 (Spray Glue Coated), IP65 (Thick Glue Coated), IP67 (Tube Water proof),IP68 (Glue Tube /Silicone Tube Waterproof)
- Lumen Maintenance: 55°C: L70/B10>54000hrs, lumen maintenance 88.51%, L90/B10>47000hrs, lumen maintenance 89.95%
85°C: L70/B10>54000hrs, lumen maintenance 86.01%, L90/B10>38000hrs, lumen maintenance 89.95%
- Mounting: double-side thermal conductive adhesive tape

Optical & Electrical Parameters

FN-F2835-80-48				
Voltage	CCT/Wavelength	LM/m	LM/W	W/m
48V DC	■ 2600-2800K	1141	76	15.36
	■ 2800-3100K	1158	78	
	■ 3300-3600K	1213	81	
	■ 3900-4200K	1226	76	
	□ 5000-5100K	1263	78	

Other Parameters

Model No.	LED QTY (pcs/m)	Min Cuttable Length	No Brightness Difference MAX	UL Max Run	Working Temperature	Storage Temperature
FN-F2835-80-48	80	50mm	18m	--	-20~+60°C	-20~+70°C

NOTE:

- The above data were measures under standard conditions and actual data may be different. We would update data without further notice.
- The luminous flux is tested while the corresponding-color products were lightened.
- UL max run refers to operating length at UL class II @100W.48V.
- Luminous flux values were measured accordance to IES LM-80-08. LED chips with range tolerance of +/- 10%.
- Each maximum-run requires a dedicated power feed from the driver. Do not extend exceed the recommended maximum run length. Max run may exceed Class 2 limits.
- Actual wattage may be different from the calculated wattage due to voltage drop while using.
- Actual efficacy value is determined by the specific LED driver (power supply). An estimated efficacy value can be calculated as follows: Luminous intensity divided by average power consumption.
- Do not install products in the conditions that exceed the listed ambient temperature. Exceeding the maximum ambient temperature may damage LED chips, reduce the total lamp life, luminous intensity output, and/or adversely impact color consistency.
- Operating temperature was measured under the minimum and maximum ambient temperature environment.
- Cutting segment are marked on the profile below.

Performance


- Photometric & Colorimetry data measured in accordance to IES LM-79-08, in Blueview 's TUV Innovation Lab.

Compliance & Regulatory Approvals

	CE LVD	Standard: EN 60598-2-21: 2015; EN 60598-1: 2015; EN 62471: 2008; EN 62493:2015; EN 62031: 2015+A1: 2013+A2: 2015
	CE EMC	Standard: EN IEC 55015: 2019; EN IEC 61000-3-2: 2019; EN 61000-3-3:2013+A1: 2019;EN 61547: 2009
	CB	Standard: IEC 62031:2018
	UL LISTED	Standard: UL2108 E354137-Low-voltage Lighting Systems, Power Units, Luminaires and Fittings
	RoHS	Standard: IEC62321

Profile Drawings

Unit: mm [inch]

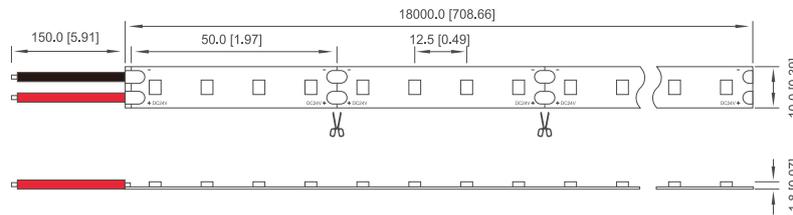

Note:

- For LED quantity less than 160leds/m with standard power, we recommend to use 20AWG parallel wire/sheathed cable with wire length less than 20cm, user need to reduce the max run when the wire length more than 20cm.
- For LED quantity more than 160leds/m with standard power, we recommend to use 18AWG parallel wire/sheathed cable in single feed, or 20AWG parallel wire or sheathed cable in both ends with wire length less than 20cm. Users need to reduce the max run properly when the wire length more than 20cm.
- Above conditions are only applicable to products with the PCB width of 10mm or more, for other width needs to be evaluated separately.


Packaging information

Model No.	Product Size L*W (mm)	Carton Size (mm)	Meter/Reel	Reel/Carton	Net Weight (kg)	Gross Weight (kg)
FN-F2835-80-48	18000*10mm	550*400*340	18	20	15.92 (1±10%)	20.75 (1±10%)

NOTE:

• The above quantity and weight are only for the illustrated packaging method. There will be differences in the quantity and weight with other packaging methods.

Ordering Code

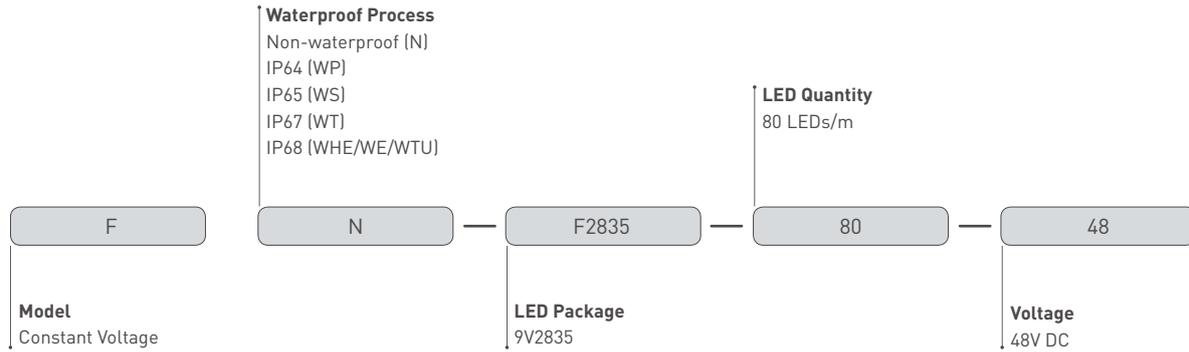

Note:

For more info about waterproof process, please refer to the waterproof instruction.

If the strip light adopts WT/WTS/WTU processes, it can only be made up to 10 meters long, for WS process, only be made up to 15 meters long.

Recommended power supply upon working length

FN-F2835-80-48	Operating Length (m)								
Parameters	1	2	3	4	5	6	7	8	9
Total Power (W)	14.784	29.76	44.496	59.04	72.96	87.36	100.8	113.76	126.72

FN-F2835-80-48	Operating Length (m)								
Parameters	10	11	12	13	14	15	16	17	18
Total Power (W)	138.72	151.2	162.24	172.8	183.36	192	201.6	210.24	217.44

DALI Dimmer&Power Supply

DALI Dimmer



Model No.: BV-2304B

Power Supply



Model No.: HLG Series



Model No.: ELG Series



NOTE: Above power supplies are available in

BLUEVIEW ELEC-OPTIC TECH CO.,LTD

☐ Tel.: +86-28-8148 0011
☐ Fax: +86-28-8148 1258

☐ Web.: www.blueviewled.com
☐ Email: sales@blueviewled.com

☐ Add.: No. 1000, Section 2, Konggang 2nd Road, Shuangliu, Chengdu 610207, Sichuan, CHINA